


# Flat Style

## Residential Fixed Skylights

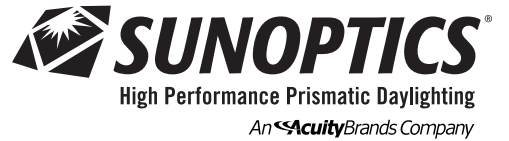

### Frame Model 800MD

#### KEY FEATURES

Prismatic Design  
 Bronze Finish  
 Specific sizes available through Home Depot (See page 2 for details)


**Warranty:** 5-year and 10-year limited warranty available. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

#### PRODUCT PROFILE

Details Not To Scale

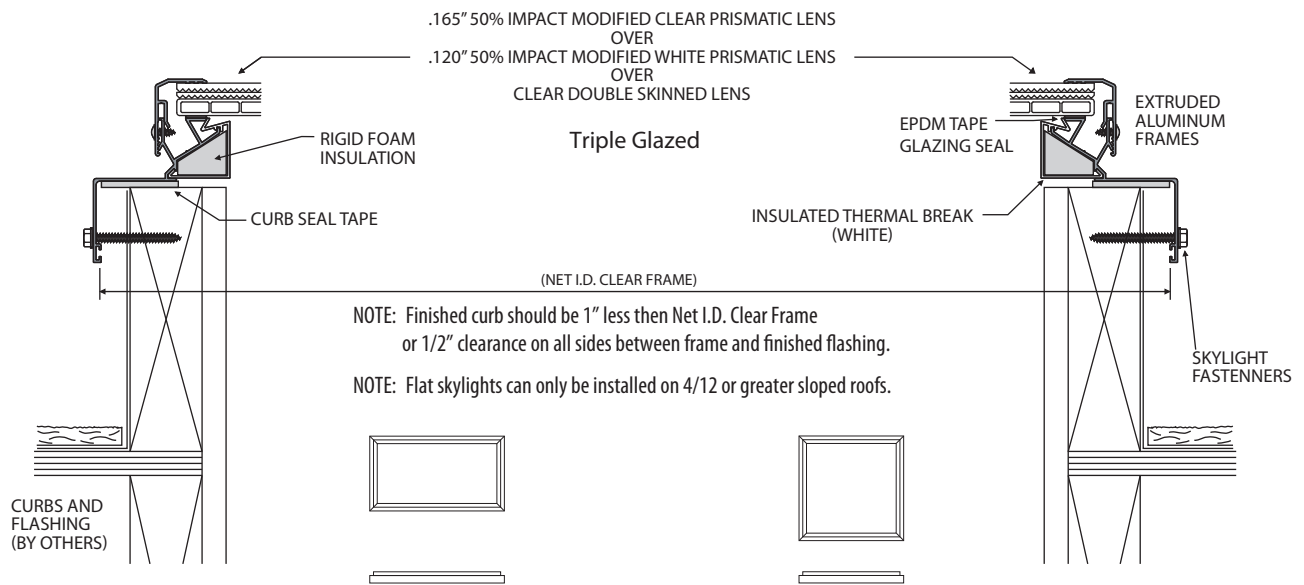

#### SPECIFICATIONS

Skylights shall be Sunoptics model 800MD ( curb mounted ) as manufactured by Sunoptics Skylights, 6201 27th Street, Sacramento Ca. 95822 916/395-4700

Skylights shall be glazed ready for installation.

Skylight frames shall be fabricated from 6063 T5 aluminum, finish to be bronze powder coat. Frames shall have integral condensation and weepage gutters which drain interior moisture to the outside. Corners shall be mitered and welded. Skylight frames shall be insulated and thermally broken. The acrylic glazing shall be separated from the skylight frame with a wet silicone applied seal.

Skylights shall be Triple Glazed using .165" 50% Impact Modified Clear prismatic acrylic outer lens over .120" 50% Impact Modified White prismatic acrylic inner lens over Clear twin wall polycarbonate lower lens, CC1 rated, glazed in a flat configuration. (Requires Minimum 4" on 12" slope roof)

Note: All units include Thermal Break, Curb Tape, and screws.

Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate lenses. Refer to the compatibility tables for suitable uses on our website.

Skylights not for use in Harsh, Corrosive, Marine and high-humidity Environmental Conditions such as Marina, Greenhouses, Petrol-Chemical facilities or other chemicals where the skylights may be exposed to such conditions.

Type	SHGC	U-Value	VLT
Triple Glazed Acrylic/Acrylic/Acrylic	.25	.36	.63

**Cleaning Acrylic Lenses:** Frequency of cleaning is determined by site conditions. When cleaning acrylic lenses, use only water or water with a mild soap. Use a soft rag to minimize scratching the acrylic. A pressure washer is acceptable to use as well. Never use ammonia, aromatic or petroleum based products to clean acrylic lenses. This will cause deterioration and cracking of the lens and will void the warranty.

Skylights should not be installed in locations with an operating temperature in excess of -75° F or 180°F.

# HOME DEPOT Flat Style Skylights

## FIXED SKYLIGHTS - HOME DEPOT MODEL NUMBERS

Flat Type


- RES R2020 W26.625 L26.625 TGZ 50CC2 LENSCLWHCL 800MD BZ
- RES R2030 W26.625 L38.625 TGZ 50CC2 LENSCLWHCL 800MD BZ
- RES R2040 W26.625 L50.625 TGZ 50CC2 LENSCLWHCL 800MD BZ

## NET I.D. CLEAR FRAME

DIMENSIONS

- 26 5/8" X 26 5/8"
- 26 5/8" X 38 5/8"
- 26 5/8" X 50 5/8"

## MODEL NUMBER LOGIC

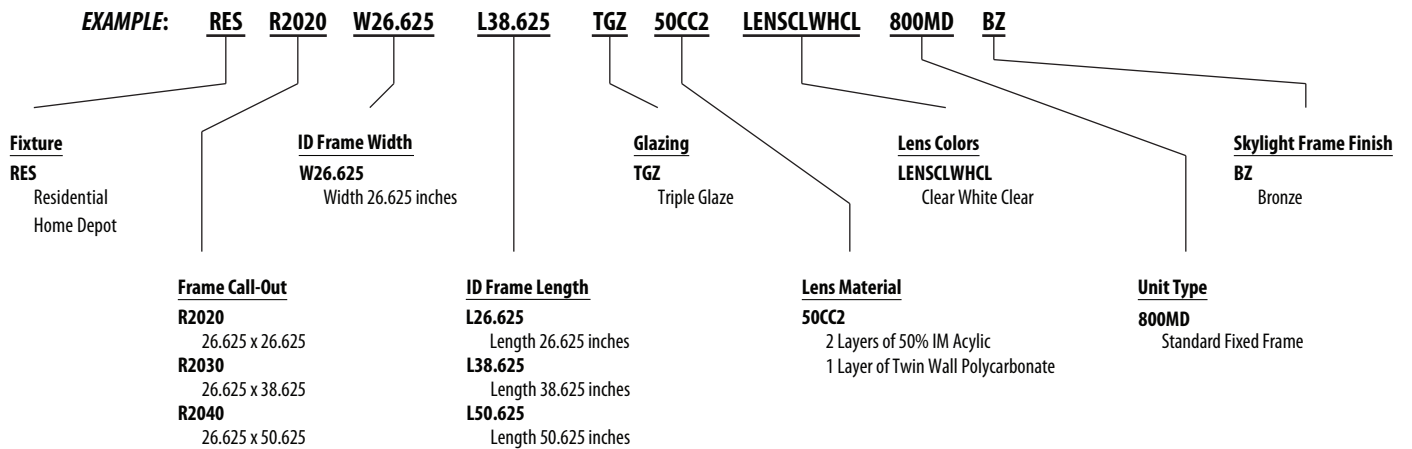

800MD\_FLAT\_HD\_Fixed Skylights