


Manually Venting

Residential Flat Skylights

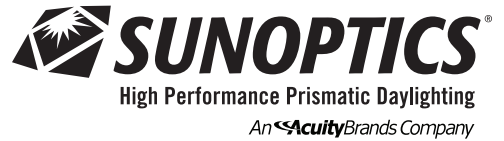

Frame Model 840B

KEY FEATURES

- Manual Operator for Ease of Opening
- Integrated Bug Screen
- Bronze Finish
- Specific sizes available through Home Depot (See page 2 for details)


Warranty: 5-year and 10-year limited warranty available. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

PRODUCT PROFILE

Details Not To Scale

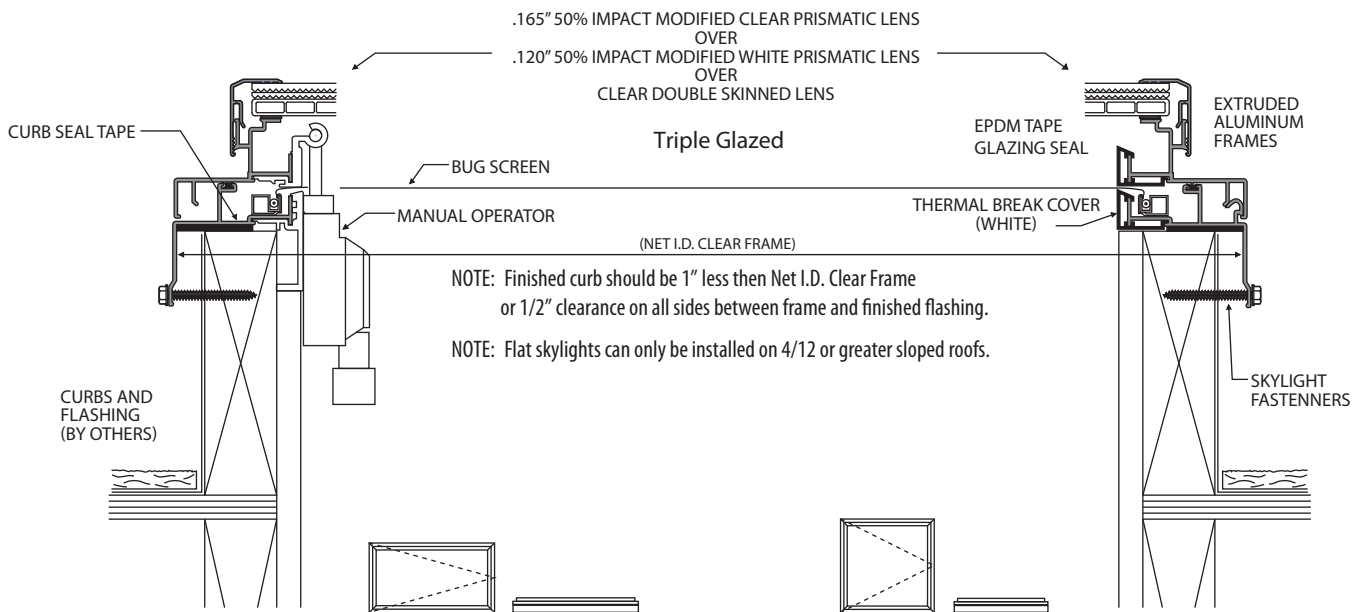

SPECIFICATIONS

Skylights shall be Sunoptics model 840B (curb mounted) as manufactured by Sunoptics Skylights, 6201 27th Street, Sacramento Ca. 95822 916/395-4700

Skylights shall be glazed ready for installation.

Skylight frames shall be fabricated from 6063 T5 aluminum, finish to be bronze powder coat. Frames shall have integral condensation and weepage gutters which drain interior moisture to the outside. Corners shall be mitered and welded. Skylight frames shall be insulated and thermally broken. The acrylic glazing shall be separated from the skylight frame with a wet silicone applied seal.

Skylights shall be pole operated and include an integrated bug screen.

Skylights shall be Triple Glazed using .165" 50% Impact Modified Clear prismatic acrylic outer lens over .120" 50% Impact Modified White prismatic acrylic inner lens over Clear twin wall polycarbonate lower lens, CC1 rated, glazed in a flat configuration. (Requires Minimum 4" on 12" slope roof)

Note: All units include Insulated Thermal Break (ITBR), Curb Tape, and screws.

Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate lenses. Refer to the compatibility tables for suitable uses on our website.

| Type | SHGC | U-Value | VLT |
|---------------------------------------|------|---------|-----|
| Triple Glazed Acrylic/Acrylic/Acrylic | .25 | .36 | .63 |

Standard pole is 3ft. and adjustable to 5ft.
Also available with 3 ft. extensions.

Skylights not for use in Harsh, Corrosive, Marine and high-humidity Environmental Conditions such as Marina, Greenhouses, Petrol-Chemical facilities or other chemicals where the skylights may be exposed to such conditions.

Cleaning Acrylic Lenses: Frequency of cleaning is determined by site conditions. When cleaning acrylic lenses, use only water or water with a mild soap. Use a soft rag to minimize scratching the acrylic. A pressure washer is acceptable to use as well. Never use ammonia, aromatic or petroleum based products to clean acrylic lenses. This will cause deterioration and cracking of the lens and will void the warranty.

Skylights should not be installed in locations with an operating temperature in excess of -75° F or 180°F.

HOME DEPOT Manually Venting - Flat Skylights

FIXED SKYLIGHTS - HOME DEPOT MODEL NUMBERS

Flat Type

- RES R2020 W26.625 L26.625 TGZ 50CC2 LENSCLWHCL 840B BZ
- RES R2030 W26.625 L38.625 TGZ 50CC2 LENSCLWHCL 840B BZ
- RES R2040 W26.625 L50.625 TGZ 50CC2 LENSCLWHCL 840B BZ

NET I.D. CLEAR FRAME

DIMENSIONS

- 26 5/8" X 26 5/8"
- 26 5/8" X 38 5/8"
- 26 5/8" X 50 5/8"

MODEL NUMBER LOGIC

